




Control unit for swing gate operators
with progressive start and stop, radio receiver
"Rolling Code" 433.92 MHz.

TECHNICAL DRAWINGS

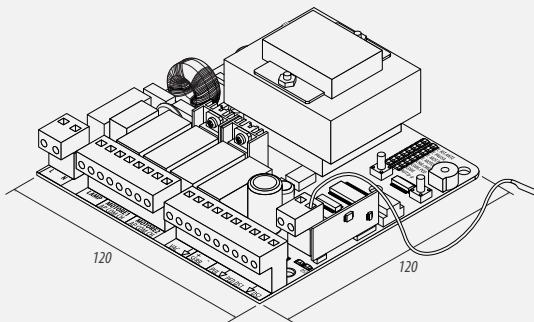

FEATURES

- Multifunction control unit for swing gates with one or two leaves.
- With limit switch management and deceleration speed adjustment.
- Integrated "Rolling Code" radio receiver module, 433.92 MHz.
- Outputs for security devices, accessories and integrated electric locks.
- With Pedestrian function - The control unit allows activating only one motor so that people can pass by. With this function, when pressing the command, only one leaf will open.
- Prepared for condominiums.
- The control unit allows automatic closing after a certain waiting time, up to a max. of 4 min.
- Large and robust electronic box *MEB01*.

TECHNICAL FEATURES

POWER INPUT TO BOARD	230V / 50Hz or 110V / 60Hz
MAX MOTORS NOMINAL POWER	500W
MAX ELECTRIC LOCK OUTPUT	12VDC 15W
MAX ACCESSORIES OUTPUT	24VAC 3W
PROTECTION FUSE	F1=5A
WORKING TEMPERATURE	-20°C ~ +60°C
INCORPORATED RADIO RECEPTOR	433.92 Mhz
REMOTE CONTROLS	Fixed Code / Rolling Code
MAX MEMORY CAPACITY	150 Codes

PACKAGING

Package size: 175*125*53mm
Package weight: 0,741Kg

