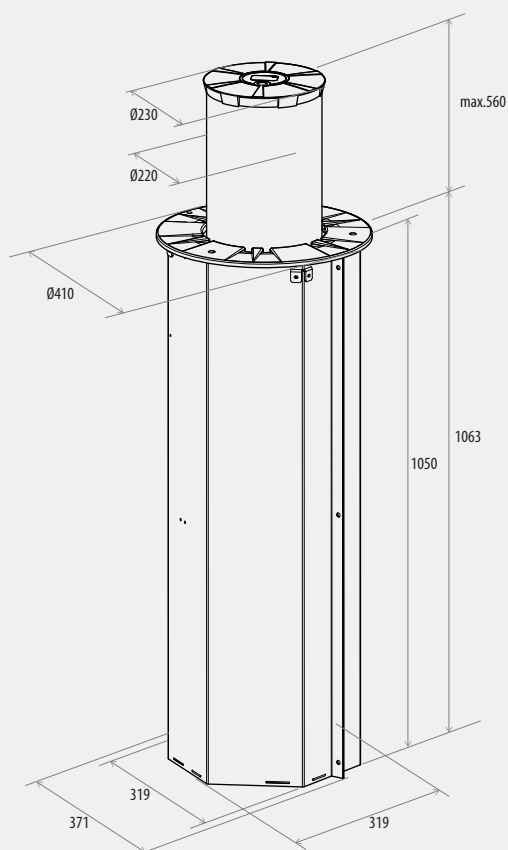


**230V electromechanical stainless steel hydraulic bollard**

The hydraulic system ensures smooth bollard movement.

TECHNICAL DRAWINGS**FEATURES**

- Automatic hydraulic deterrent bollard, 230 V.
- 4 mm stainless steel inner column.
- Corrosion-resistant galvanized steel outer mast body (foundation box).
- No calibration adjustment is required, as it is operational immediately after installation.
- The bollard elevation is automatically adjusted at the factory.
- LED light with 360° visibility, both with the bollard lowered and raised, ensuring perfect retroreflective visibility.
- Control unit in box and 2 remote controls included in the kit.
- The control unit manages movement and provides maximum safety and performance.

TECHNICAL FEATURES

POWER SUPPLY	230 Vac
ABSORBED POWER	250 W
ENGINE RPM	1400
CONDENSER	12,5 µF
WORKING TEMPERATURE	-20°C ~ +55°C
LED POWER SUPPLY	24 Vac
PROTECTION DEGREE	IP 66
OPENING OR CLOSING TIME	7 sec.
BOLLARD STROKE	560 mm
WEIGHT	80Kg