




Studied solutions for gates up to 8 meters.


Robust construction provides high strength and resistance. Protection against bad weather. Easy installation. The 3 different courses (300mm, 400mm and 600mm) enable the automation of gates up to 4 meters per sheet. Developed with innovative feature, allowing the installer a quick and practical transformation from right to left, or vice versa.

TECHNICAL DRAWINGS

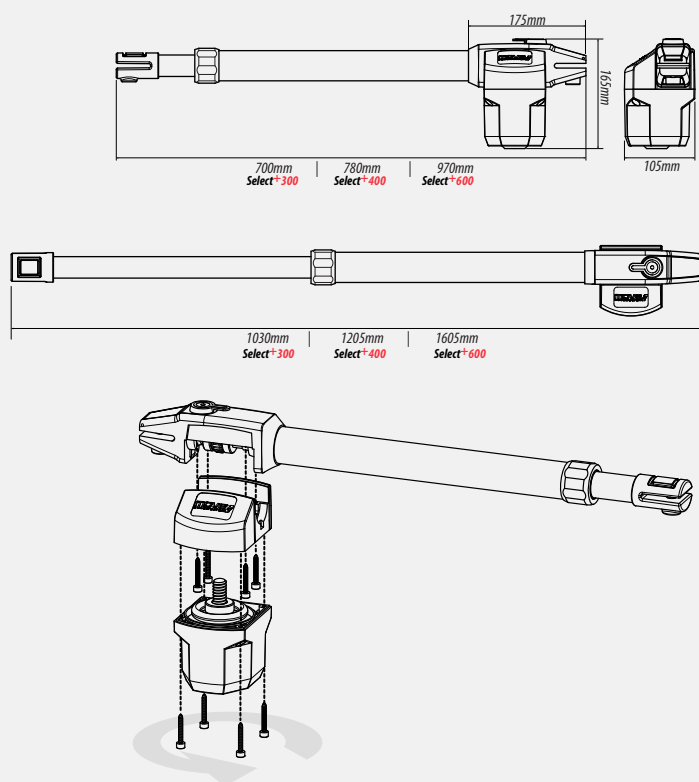

FEATURES


- Electromechanical, telescopic operators, safe and reliable, suitable for automating gates with leaves up to 4 m long and up to 350 kg.
- Diversity of choice: Select+ is available in three different sizes (Select+ 300, 400, 600 mm), and several power supply (24V, 110V, 230V).
- Select+ swing gate operators are ideal for installation on any type of swing gate, both for residential use and condominiums.
- Versatility: practical and powerful, the Select+ motor is built to be mounted in a right or left configuration, allowing greater flexibility in the use of each motor.
- Security: manual release with key lock.
- Installation is simplified and it is possible to achieve a high degree of opening up to a maximum of 110°.
- The worm screw is made entirely of steel with a diameter of 20mm to guarantee durability, high performance and fluid movement.
- Built-in capacitor in 230V and 110V versions.
- With inner tube in stainless steel and outer tube in lacquered aluminum.
- Adjustable mounting brackets.

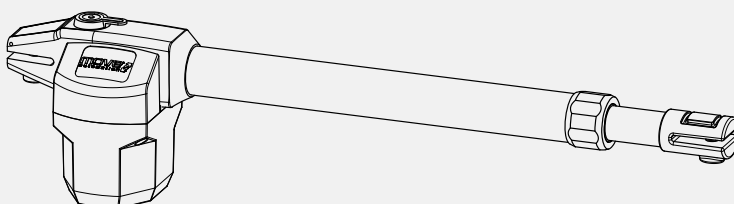


TECHNICAL FEATURES

TECHNICAL FEATURES	Select+ 300			Select+ 400			Select+ 600		
POWER SUPPLY	230 Vac	110 Vac	24 Vcc	230 Vac	110 Vac	24 Vcc	230 Vac	110 Vac	24 Vcc
POWER	280 W		70 W	280 W		70 W	280 W		70 W
ABSORBED CURRENT	1,8 A		2,4 A	1,8 A		2,4 A	1,8 A		2,4 A
ROD SPEED (cm/sec)	1,8cm/sec		2cm/sec	1,8cm/sec		2cm/sec	1,8cm/sec		2cm/sec
USABLE STROKE	300mm			300mm			300mm		
MAXIMUM LENGTH PER LEAF	2m			2m			2m		
MAXIMUM WEIGHT PER LEAF	350 Kg		300 Kg	350 Kg		300 Kg	350 Kg		300 Kg
PROTECTION CLASS	IP44								
THERMAL PROTECTION	150°								
CYCLES /HOUR	18		50	18		50	18		50
WORKING TEMPERATURE	-20°~+70°								
LUBRIFICATION	Ferrograf Permanente								
CAPACITOR	8µF	16µF	---	8µF		---	8µF	16µF	---
MOTOR WEIGHT	6 Kg		5.5 Kg	6 Kg 16µF		5.5 Kg	6 Kg		5.5 Kg


INCLUDED IN THE KIT



2x operators
Select+



control unit




electronic box
MEB01



2x remote controls
TXMF+



pair of photocells
FOTOP-SP2



back and front
brackets



release keys



instructions
manual

ACCESSORIES



TXMFW



WKMO



KSM1



RMM1



FLM1

PACKAGING

Select+ 300

Package size: 825*362*162mm

Package weight: ±14 Kg

Select+ 400

Package size: 825*362*162mm

Package weight: ±15Kg

Select+ 600

Package size: 1015*362*162mm

Package weight: ±16 Kg



PALLET

Pallet Dimension: 1200*800mm

Qty per pallet: 25 pcs