




innovated "AAS" smart system

"AAS" (auto adaptive system) allow the industrial door opener will automatic identify the door condition to define a best program for its "OPEN/ CLOSE speed", "Soft start/ Soft stop ranges" and the certain "force sensitivity".

TECHNICAL DRAWINGS

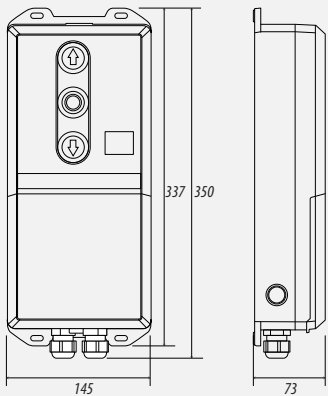

FEATURES

- Standard multi-functional control system for **base** motors.
- Multi-terminal port compatibility allows all kinds of accessories connection, for example the control device, safety device and work with various access systems.
- All DC 24V in control box.
- With connection cable 5m, 6m, 8m or 10m length.
- Multi-function ports supported for safety devices.
- Built-in AAS system.

TECHNICAL FEATURES

WORKING VOLTAGE	24V DC
WORKING CURRENT	60mA (no load)
IP PROTECTION CLASS	IP54
WORKING TEMPERATURE	-40°C ~+60°C
CABLE LENGTH	5; 6; 8 or 10m

PACKAGING

Package size: 355*150*105mm
Package weight: 1,107Kg

