




control unit with box
for roller shutter operators bolt / Tiger



TECHNICAL DRAWINGS

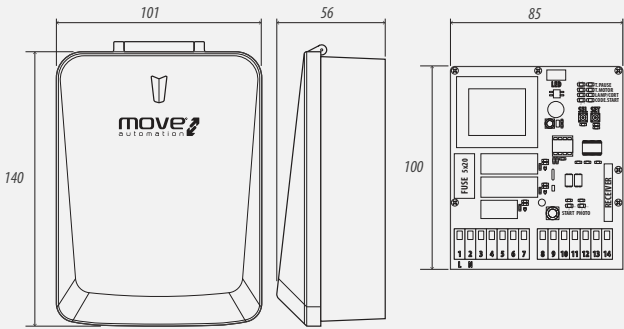

FEATURES

- Electronic control unit for roller shutter door motors with built-in 433,92 MHz radio receiver, complete with enclosure.
- Available with 110Vac or 230Vac power supply
- Allows programming of working time, pause time for automatic closing, courtesy light, learning remote commands, etc.
- Output for accessories, photocells, pushbutton, flashing light, etc.
- The control unit can memorize up to 200 transmitters with fixed code or “Rolling Code”.

TECHNICAL FEATURES

POWER SUPPLY	230V/50Hz or 110V/60Hz
MAX MOTOR LOAD	650 W
MAX ACCESSORIES LOAD	24V: 3 W
PROTECTION FUSE	F1 = 5A
WORKING TEMPERATURE	-20°C ~ +60°C
INCORPORATED RADIO RECEPTOR	433.92 Mhz
REMOTE CONTROLS	Fixed Code / Rolling Code
MAX MEMORY CAPACITY	200 Codes

PACKAGING

Package size: 170*145*58mm
Package weight: 0,420Kg

