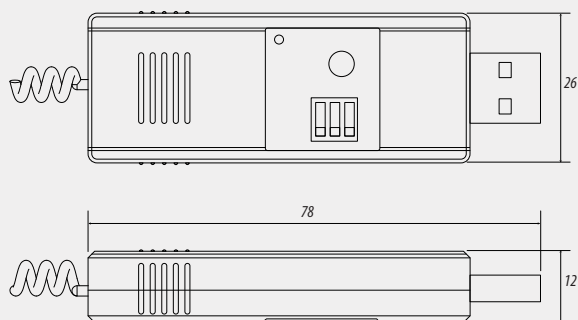


**Plug-in receiver for base_**

Allows you to control your industrial door via remote control.

TECHNICAL DRAWINGS**FEATURES**

- The external receiver uses open source standard HCS300 format and 433MHz frequency.
- Also available on the 868 MHz frequency. Ideal solution for places exposed to a lot of interference such as hospitals, airports, etc...
- Easily connects to **base_** engine via standard USB interface.
- This receiver can store up to 50 codes.
- Remote control function adjustable via 3 DIP switches.

TECHNICAL FEATURES

CODE TYPE	Fixed and Rolling Code
FREQUENCY	433,92 MHz / 868 MHz
CODE LEARNING	≤50 codes

PACKAGING

Package size: 96*40*35mm

Package weight: 0,024Kg

