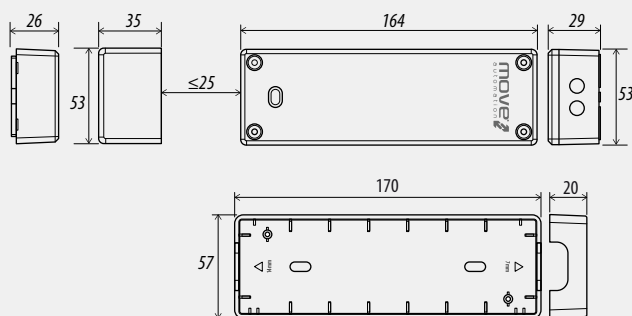


**for garage doors with integrated wicket door**

The garage door only opens when the pedestrian door is closed.

TECHNICAL DRAWINGS**FEATURES**

- Highly secure and intelligent garage door management system designed to prevent garage door operation when the service door is open, thus ensuring user and vehicle safety and door integrity.
- Advanced wireless technology - Adopting efficient wireless communication technology, no wiring required, easier installation.
- Anti-interference design ensures stable and reliable signal transmission.
- Uses low power consumption components to extend battery life and reduce maintenance frequency (up to 2 years on a typical residential door).
- Works with RWM1 receiver (sold separately).
- With height-adjustable mounting bracket for different door frames.
- Compatible with all Move Automation motors.

TECHNICAL FEATURES

POWER SUPPLY	3.6V DC (3.6V Lithium battery)
BATTERY CAPACITY	2600mAh
OPERATING CONSUMPTION	75 ua
STANDBY CONSUMPTION	18 ua
RADIO TECHNOLOGY	Trio-Frequency
FREQUENCY	409.025 MHz~458.4MHz
SIGNAL MODULATION	FSK
CHANNELS	2
IP GRADE	IP65
OPERATING TEMPERATURE	-20°C ~+60°C

PACKAGING

Package size: 122*192*50mm

Package weight: 0,125Kg

