




**Operator with articulated arm for swing-leaf gates
with max single-leaf width of 4m**

Its articulated arms make it the optimal solution for large posts and unusual installation dimensions.

TECHNICAL DRAWINGS

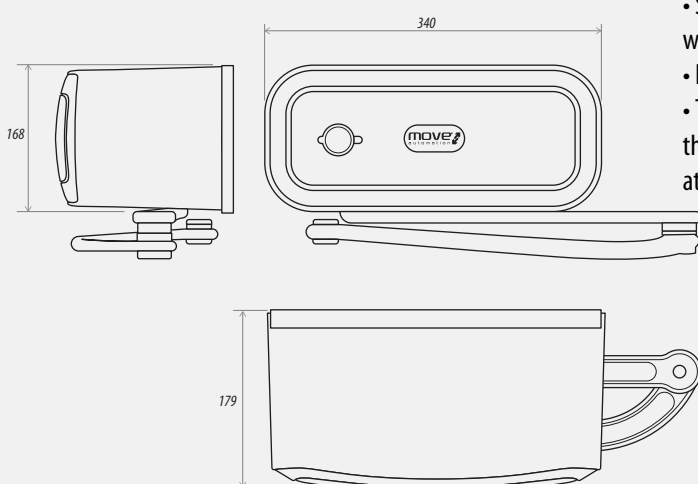


FEATURES


- Non-reversible articulated arm automation for swing gates with leaves up to 4m.
- Lever release system protected by key. The release system allows manual movement of the door leave even without power supply.
- Solid aluminium cover with LED lighting.
- Solution for applying in private homes and apartment buildings, suitable for gates with large pillars.
- External controller in enclosure included in the Kit.
- This operator, along with its corresponding Move Automation control unit, allows the implementation of Soft-Start / Soft-Close system, with the speed slowing down at the end of the closing and opening operations.

TECHNICAL FEATURES	bend> 230V	bend> 24V
POWER SUPPLY	230V 50Hz	DC24
POWER	330W	180W
FORCE	200N	150N
CONTINUOUS OPERATION	8~15 min	continuous
MAX. WIDTH PER LEAF	4m	2,5m
MAX. WEIGHT PER LEAF	400Kg	500Kg
PROTECTION GRADE	IP44	
WORKING TEMPERATURE	-45°C~+65°C	
CONTROL UNIT	included	


INCLUDED IN THE KIT

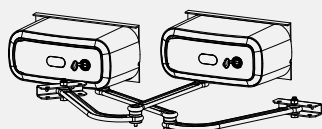


2x operators (right and left)
bend>



control unit



electronic box
MEB01



2x remote controls
TXMF+



pair of photocells
FOTOP-SP2



release keys



instructions
manual

ACCESSORIES



TXMFW



WKMO



KSM1



RMM1



FLM1

PACKAGING

Package size: 2x 495*275*270mm

Package weight: 2x ± 15Kg

