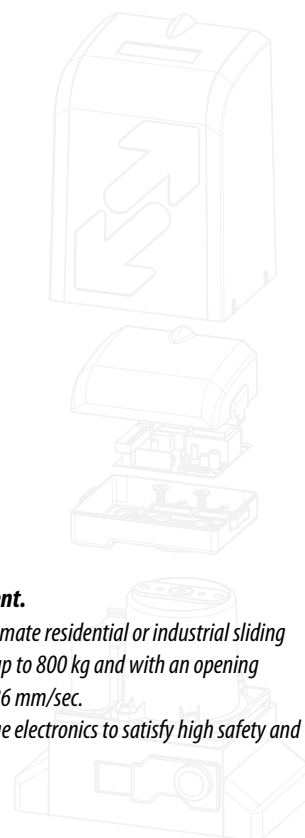
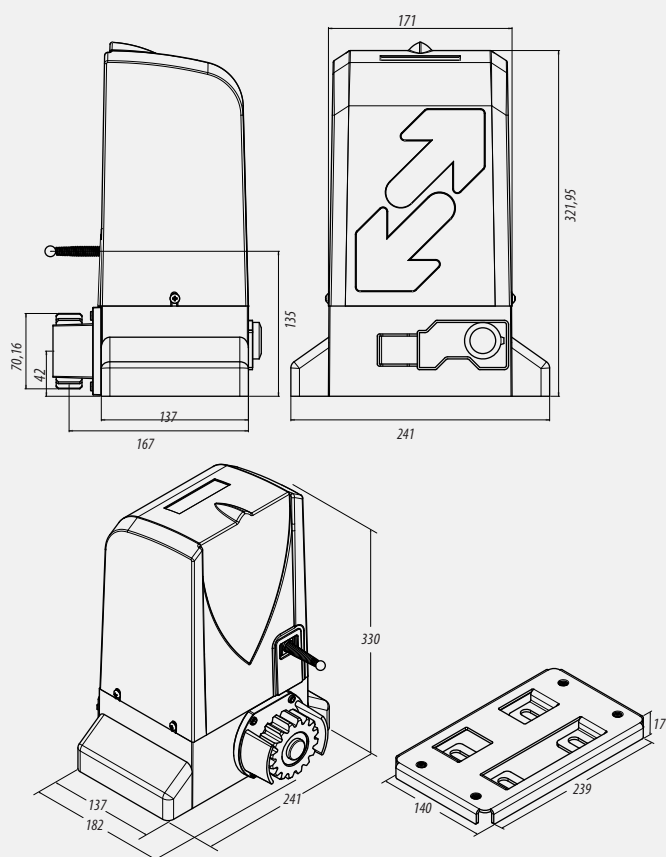


**Robust and silent.**

Designed to automate residential or industrial sliding gates weighing up to 800 kg and with an opening speed of up to 186 mm/sec.

With cutting-edge electronics to satisfy high safety and functionality.

**TECHNICAL DRAWINGS****FEATURES**


- Slider+ operators for sliding gates are ideal for use in any type of sliding gate for residential or condominium use.
- Gearmotor lubricated with oil and grease.
- For sliding gates with leaves up to 800 kg.
- Cast aluminum construction for high robustness and resistance
- Available in Slider+500 and 800 versions, with 230V or 110V power supply.
- With mechanical limit switches.
- A comfortable and safe key unlocking system allows movement manual in the event of a breakdown or failure in the electrical power supply.
- Equipped with an electronic control unit, protected and easily accessible, that manages the operation of all automation, with quick and intuitive programming thanks to the LED indicator. 433.92 MHz rolling code receiver radio and memory unit with a capacity of 200 codes integrated into the control unit.
- With 3mm steel fixing base.
- Programmable automatic closing.

TECHNICAL FEATURES


TECHNICAL FEATURES	Slider+ 500		Slider+ 800	
POWER SUPPLY	230 Vac 50Hz	110 Vac 60Hz	230 Vac 50Hz	110 Vac 60Hz
POWER	280 W		370 W	
MAXIMUM SPEED	156 mm/sec		186 mm/sec	
THERMAL PROTECTION	120°C			
WORKING TEMPERATURE	-25°C ~ +55°C		-25°C ~ +65°C	
IP PROTECTION	IP44			
NOISE LEVEL	≤56dB			
WORKING FREQUENCY	25%		40%	
MAXIMUM WEIGHT OF LEAF	500 Kg		800 Kg	
CAPACITOR	8µF	25µF	12µF	35µF
CONTROL UNIT	included			

Move Automation always recommends installing a warning light as additional security for the automation system.


INCLUDED IN THE KIT




operator
Slider⁺




control unit



electronic box
MEB02




fixing plate



limit switch
fixing plates



2x release keys



2x remote controls
TXMF⁺



jogo de fotocélulas
FOTOP-SP2



instruction
manual

ACCESSORIES



TXMFW



Steel Gear Rack C22Z



KSM1



Nylon Gear Rack ACRV6



Flashing Light FLM1



WKMO



RMM1

PACKAGING

Slider⁺ 500

Package size: 255*355*334mm

Package weight: ±10Kg

Slider⁺ 800

Package size: 255*355*334mm

Package weight: ±11Kg



PALLET

Pallet Dimension: 1200*800mm

Qty per pallet: 42 pcs